

# INSPECTION D SCOPE MT



## D SCOPE MT

*High resolution microscope for Multi-Fiber connectors*


The D SCOPE MT microscope for MTP/MPO connectors is **highly repeatable and extremely fast**.

In the same measurement cycle, D Scope MT checks every optical fiber surface condition, and **allows the operator to control the cleanliness of the connector endface and guideholes**.

The fully automatic D SCOPE MT is the **ideal instrument for checking the conformity of connectors to Industry Standards**.

With BLINK, the Data-Pixel software platform, D Scope MT uses Deep Learning technology. **This AI has the advantage of improving the detection of defects, but above all, of being scalable**. If you want to deal with specific defect or atypical fiber cases, **Blink's Deep Learning can be taught to recognize defects from your samples**.

With very high measurement accuracy, D SCOPE MT has been designed for use in **high volume manufacturing environments or the most demanding laboratories**.

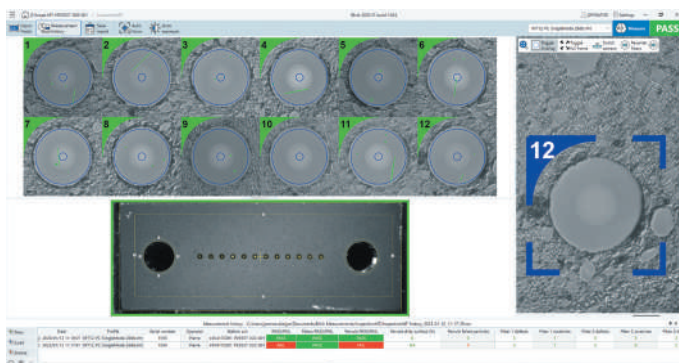

DEEP LEARNING  
INSIDE

### KEY FEATURES :

Testing of PC/APC connectors and ferrules from 1 to 64 fibers

Ultra-fast measurement time

Automatic Pass/Fail defect analysis

Automatic focus adjustment

High resolution optics with defect size detection of 0.3µm

Compliance with Industry Standards as IEC 61300-3-35

Real time full connector endface view

Intuitive Blink software with database connectivity

Compatible with desktop PC, laptop, tablet PC

### MEASUREMENT TIMES :

CONNECTOR TYPE	FIBER SCREENING ONLY	WITH END FACE VIEW
MT 12	3 sec.	5 sec.
MT 24	5 sec.	7 sec.

### SPECIFICATIONS :

Magnification (fiber screening) :	x480*
Defect size detection (µm) :	0.3
Outputs :	USB 3.0 + 2.0
Power source :	12V
Dimensions H x W x L (mm) :	105 x 230 x 285
Weight (kg) :	7

\*On 24" screen, 96 dpi

**TYPICAL REPORT (FOR MT 12):**

Inspection MT report Generated by Blink Data-Pixel

Date	2023-01-12 11:05	Serial number	1550	<b>FAIL</b>
Measurement device	D Scope MT	Operator	Pierre	
Device s/n	4104170281-P03537-020-001	Station s/n	4104170281-P03537-020-001	
Profile	MT12-PC-SingleMode 25db Copy.lmt			
Fiber diameter	125µm			


  

Ferrule control	Allowed	Measured	Pass/Fail
Dirty surface (%)	5%	1.179%	PASS
Number of failed particles	0	28	FAIL


  

Zone A: Core			Zone B: Cladding			Pass/Fail
Fiber	Defects	Scratches	Defects	Scratches		
	Diameter: 15 µm Scratches Allowed: Up to 2 ≤ 3µm None > 3µm Defects Allowed: None		Diameter: 110 µm Scratches Allowed: No limit ≤ 3µm Up to 3 from 3-5µm None > 5µm Defects Allowed: No limit ≤ 5µm Up to 5 from 5-10µm None > 10µm			
1	0	0 ≤ 3µm 0 > 3µm	1 ≤ 5µm 0 from 5-10µm 0 > 10µm	1 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
2	0	0 ≤ 3µm 0 > 3µm	3 ≤ 5µm 0 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
3	0	0 ≤ 3µm 0 > 3µm	2 ≤ 5µm 0 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
4	0	0 ≤ 3µm 0 > 3µm	2 ≤ 5µm 0 from 5-10µm 0 > 10µm	2 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
5	0	0 ≤ 3µm 0 > 3µm	4 ≤ 5µm 0 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
6	0	0 ≤ 3µm 0 > 3µm	2 ≤ 5µm 0 from 5-10µm 0 > 10µm	1 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
7	0	0 ≤ 3µm 0 > 3µm	1 ≤ 5µm 2 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
8	0	0 ≤ 3µm 0 > 3µm	2 ≤ 5µm 0 from 5-10µm 0 > 10µm	2 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
9	0	0 ≤ 3µm 0 > 3µm	3 ≤ 5µm 0 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
10	0	0 ≤ 3µm 0 > 3µm	4 ≤ 5µm 0 from 5-10µm 0 > 10µm	0 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
11	0	0 ≤ 3µm 0 > 3µm	2 ≤ 5µm 1 from 5-10µm 0 > 10µm	1 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS
12	0	0 ≤ 3µm 0 > 3µm	5 ≤ 5µm 1 from 5-10µm 0 > 10µm	1 ≤ 3µm 0 from 3-5µm 0 > 5µm		PASS

**AUTOMATIC PASS/FAIL RESULT ON FIBER DEFECTS :**

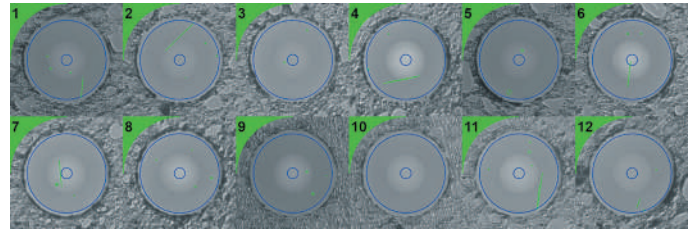

**AUTOMATIC PASS/FAIL RESULT ON FULL MT FERRULE CLEANLINESS :**

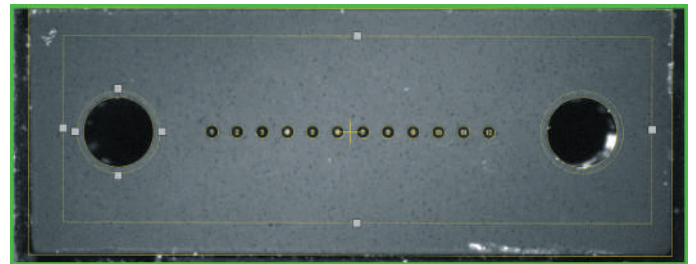

**INSPECTION OF A LC DUPLEX CONNECTOR :**



Thanks to its wide field of view camera, the Dscope MT allows to scan both ferrules of Duplex connectors in one shot whether it is LC Duplex or Very Small Form Factor connectors (CS, SN, MDC,...).

It represents a substantial time saving as the inspection results for both ferrules are obtained simultaneously without having to manipulate the connector.

**ORDER OPTIONS :**

D Scope MT unit with Blink Inspection SF & MT	70-DSMT-V1-A10-00
Flange MT Male/Female, PC/APC, 12/16/24/32 fibers	30-FL-002181
Flange MPO Male/Female, PC/APC, 12/16/24/32 fibers	30-FL-003277
Flange Single-Fiber 1.25 mm PC/APC	30-FL-002314
Flange Single-Fiber 2.50 mm PC/APC	30-FL-002315
Flange Optitap PC/APC 2.50mm	30-FL-003429
Flange Duplex Single-Fiber 1.25mm (LC, MDC, CS, SN,...)	Several references available